


Globe Valve Class 600

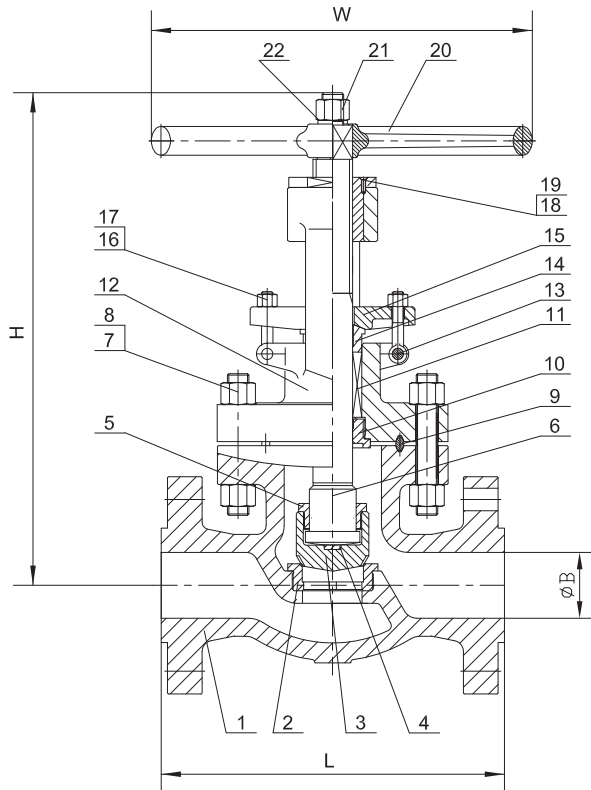

MATERIAL LIST					
NO.	Part Name	ASTM Specification (Specs - Grades/Types)			
		A 216	A 352	A 217	A 351
		WCB	LCC	WC6	C5
1	Body	A 216-WCB	A 352-LCC	A 217-WC6	A 217-C5
2	Seat Ring	A 105, LF2, 316, or 304			
	Seat Ring Surface	13CR, HF (CoCr-A), 316, 304, or Monel			
3	Disc	A 216 - WCB	A 352-LCC	A 217-WC6	A 351-CF8M
	Disc Seating Surface	13CR, HF (CoCr-A), 316, 304, or Monel			
4	Disc Thrust Plate	13CR, 316, OR 304			
5	Disc Nut	13CR, 316, OR 304			
6	Stem	13CR, 316, 304, 17-4PH, or Monel			
7	Bonnet Bolt Nut	A 194-2H	A 194-4	A 194-2H	A 194-4
8	Bonnet Bolt	A 193-B7	A 320-L7	A 193-B7	A 193-B16
9	Gasket	Ring Joint - Iron			
10	Bonnet Bushing	13CR, 316, OR 304			
11	Gland Packing	Braided Graphite & Die Formed Graphite Ring			
12	Bonnet	A 216-WCB	A 352-LCC	A 217-WC6	A 217-C5
13	Eye Bolt Pins	13CR, 316, or 304			
14	Gland	13CR, 316, or 304			
15	Gland Flange	A 216-WCB	A 352-LCC	A 217-WC6	A 217-C5
16	Gland Eye Bolts	A 193-B7	A 320-L7	A 193-B7	A 193-B16
17	Eye Bolt Nuts	A 194-2H	A 194-4	A 194-2H	A 194-4
18	Yoke Sleeve	ASTM A 439 Gr. D2C			
19	Screw	Carbon Steel			
20	Handwheel	Malleable Iron			
21	Handwheel Nut	Carbon Steel			
22	Backing Ring	Carbon Steel			

Standards:

Face to Face Dimensions: ANSI B16.10
 End Flange Dimensions: ANSI B16.5
 26" ≥ MSS SP-44
 Or API 605
 B16.34 & BS1873
 Basic Design: API 598
 Test Standard: API 598

DIMENSIONS AND WEIGHTS												
Size	NPS	2	2-1/2	3	4	6	8	10	12	14	16	18
L	In	11.50	13.00	14.00	17.00	22.00	26.00	31.00	33.00	35.00	39.00	43.00
(RF)	Mm	292	330	356	432	559	660	787	838	889	991	1092
L	In	11.63	13.13	14.13	17.13	22.13	26.13	31.13	33.13	35.13	39.13	43.13
(RTJ)	Mm	295	333	359	435	562	664	791	842	892	994	1096
L	In	11.50	13.00	14.00	17.00	22.00	26.00	31.00	33.00	35.00	39.00	43.00
(BW)	Mm	292	330	356	432	559	660	787	838	889	991	1092
ØB	In	2.00	2.50	3.00	4.00	6.00	7.87	9.75	11.75	12.87	15.25	17.25
	Mm	51	64	76	102	152	200	248	298	327	387	438
H	In	15.00	18.00	19.00	22.00	34.00	37.00	40.00	43.00	47.00	54.00	58.00
	Mm	390	445	495	570	870	940	1010	1100	1200	1371	1473
W	In	10	12	14	16	20	22	25	28	32	32	32
	Mm	250	300	350	400	500	560	640	700	810	810	810
WT	KG	57.0	73.0	89.0	149.0	417.0	542.0	700.0	900.0	1200.0	1450.0	1820.0
	LB	125.66	160.94	196.21	328.49	919.32	1194.89	1543.22	1984.14	2645.52	3196.67	4012.37

(713) 673-2073 - Fax (713) 673-4641 - Toll Free (866) GO-BERIC (462-3742)

www.bericvalves.com

Rev. 010111

Copyright 2011

Page 3GL